

Montageanleitung

P948 XL 150 Uni-Flexx



74 mm Bohrung in Sichtschalung oder in Filigrandecke einbringen.



Bei Bedarf können die Installationssegmente abgetrennt werden.




Uni-Flexx in Bohrloch einsetzen.



Uni-Flexx mit Schrauben oder Montagelaschen befestigen.



XL 150 Einbaugehäuse auf den Uni-Flexx aufsetzen.

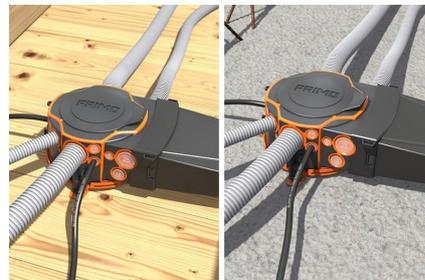

Kabel und (starre) Rohre werkzeuglos einführen. Kombi-Einführungen für Kabel und Rohre M9-M40.



Einbauöffnung 68 mm Durchmesser.



Einbauleuchte anschließen und in die Einbauöffnung stecken.

Montageanleitung

P948 XL 150 Uni-Flexx



Geeignet für Metallklammern mit Spreizlaschen sowie für Klammern mit Gummierung.



Zusätzlicher Anschlussraum, ideal für elektronische Bauteile.



Fertige Installation.

Assembly instruction

P948 XL 150 Uni-Flexx



Drill 74 mm hole in exposed formwork or in filigree ceiling.



If necessary, the installation segments can be separated..




Insert Uni-Flexx into drill hole.



Fasten Uni-Flexx with screws or mounting brackets.



XL 150 installation housing onto the Uni-Flexx.

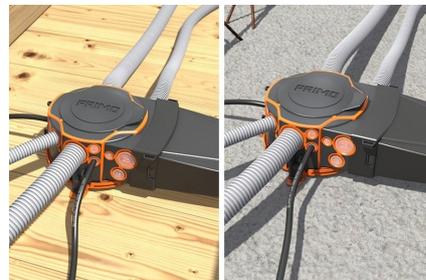

Insert cables and (rigid) tubes without tools. Combination entries for cables and tubes M9-M40.



Installation opening 68 mm diameter.



Connect the recessed luminaire and insert it into the installation opening.

Assembly instruction

P948 XL 150 Uni-Flexx



Suitable for metal staples with expanding lugs as well as for staples with rubber coating.



Additional connection space, ideal for electronic components.



Finished installation.